

GFC FastFix™

Bi-Metal


Countersunk (Torx Drive) and
Hex head concrete screw 316
Stainless Steel

Applications:

- Timber strapping & battens
- Formwork and bracing
- External coastal areas
- Fixing into concrete, brick, block and timber
- HVAC, Electrical and Plumbing

Advantages:

- Superior holding strength
- 316 Stainless Steel
- Long-lasting performance
- **Drill it. Drive it. Done!**
- Unique design with patented thread ensures high performance
- Small edge distances possible
- For use in concrete, brick and block
- TX30 for stronger grab when setting
- Removable

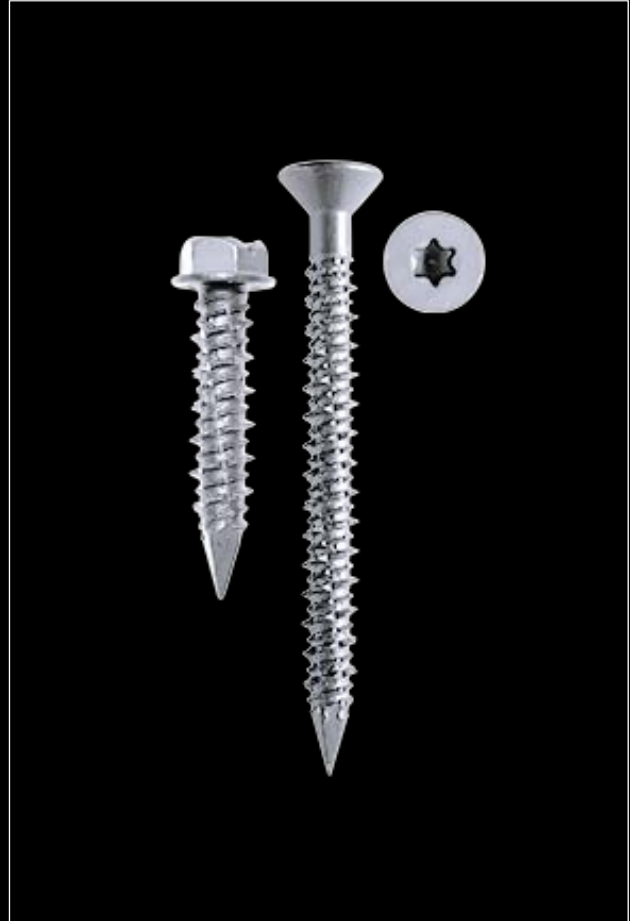

Item Code	Description (mm)	Head Type	Drill Diam (mm)	Material / Finish
FFH6.3032S	6.3 x 32	5/16" HEX	5	Hardened SS316
FFH6.3045S	6.3 x 45	5/16" HEX	5	Hardened SS316
FFH6.3057S	6.3 x 57	5/16" HEX	5	Hardened SS316
FFH6.3070S	6.3 x 70	5/16" HEX	5	Hardened SS316
FFH6.3082S	6.3 x 82	5/16" HEX	5	Hardened SS316
FFH6.3100S	6.3 x 100	5/16" HEX	5	Hardened SS316
FFC6.3070S	6.3 x 70	TX30	5	Hardened SS316
FFC6.3082S	6.3 x 82	TX30	5	Hardened SS316
FFC6.3100S	6.3 x 100	TX30	5	Hardened SS316

Specifications may be subject to change. We endeavour to ensure data is correct at time of publication.